



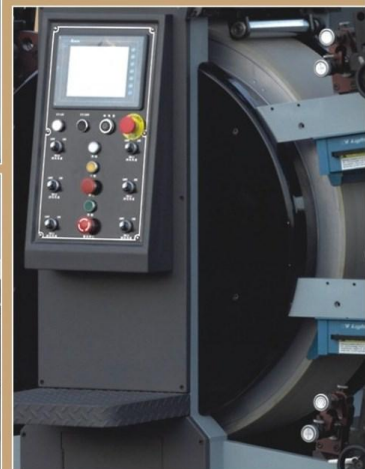

大陸印刷機械有限公司

Da Shen Printing Machine CO., LTD

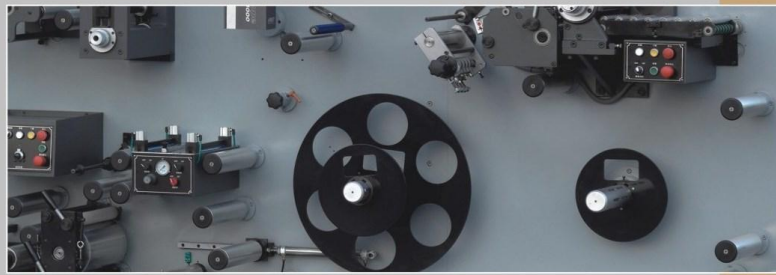

▲
▲
▲
高速全輪轉六色
多功能商標印刷機




6 Color
Full Rotary Letterpress
DS-260-R6C

Standard Accessories

- Automatic Web Tracing System 1 set
- Printing Station (with Wash Tools) 6 sets
- Edge Trimming Device 1 set
- UV Dryer System 6 sets
- Flexo Varnish Surface Coating with Water Ink Printing Device (with UV Dryer) 1 set
- Printing Cylinder 3 sets

標準配備

- 全自動對邊機1組
- 印刷座(含洗車系統)6組
- 背面圓刀修邊1組
- UV乾燥系統6座
- 上金油+水性墨印刷設備(含UV乾燥系統)1組
- 印刷版銅3套

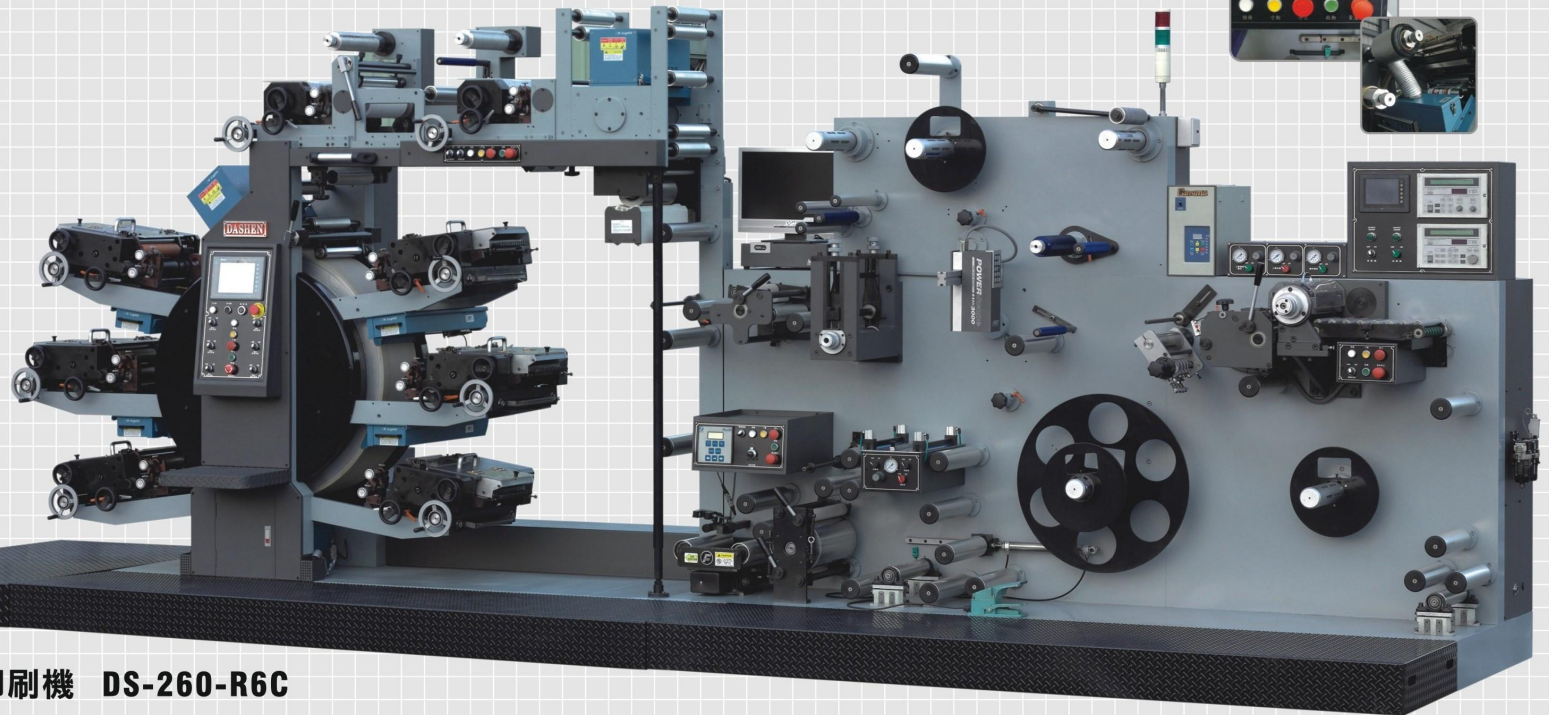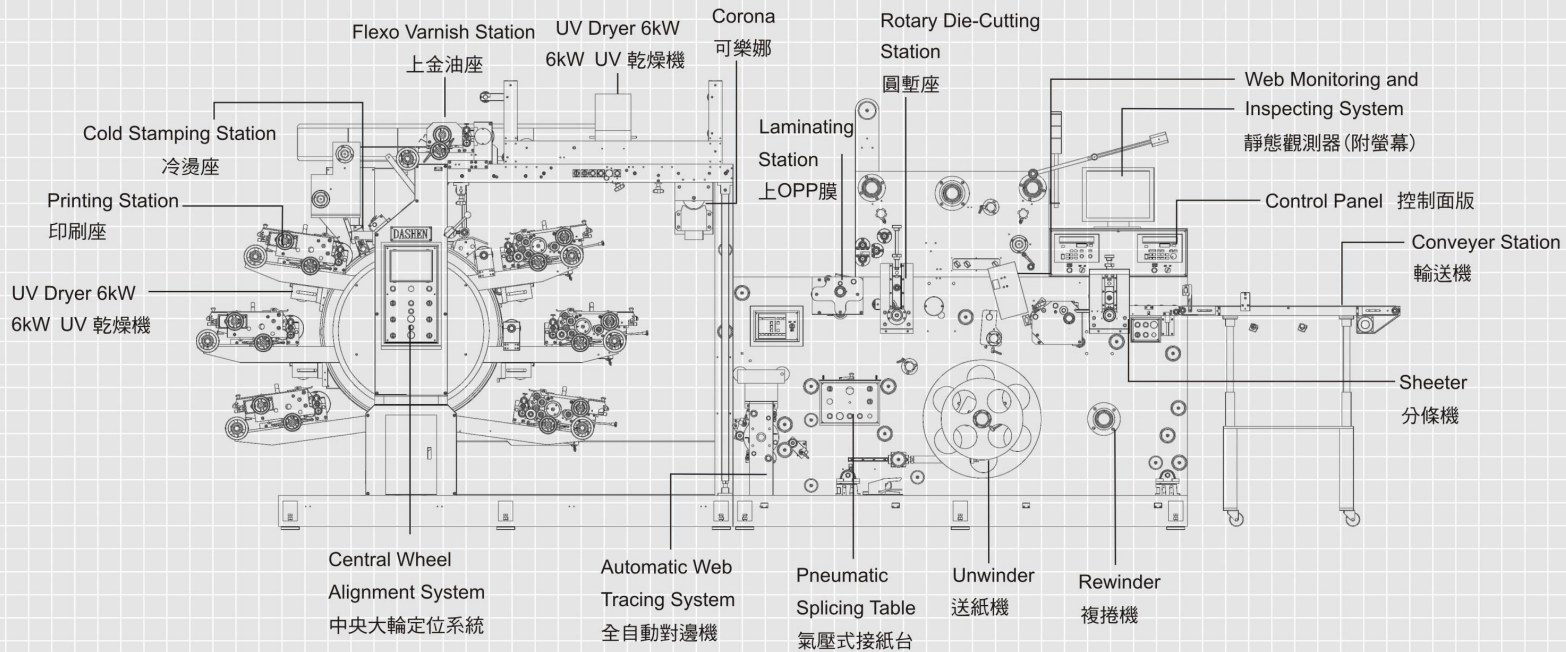

高速全輪轉六色多功能商標印刷機 DS-260-R6C

Optional Accessories

- Reverse-side Printing Device
- Converyer Station
- Sheeter Station
- Rotary Die-Cutting Station
- Web Monitoring and Inspecting System
- Laminating Device
(available for either with or without background paper)
- CORONA Treater
- Electrostatic Eliminator
- Chilled Roller with Water Cooling System
- Cold Foiled System with UV Dryer

擴充配備

背面印刷與膠底印刷設備
輸送機
裁張飛刀設備
圓斬系統
靜態觀測器加螢幕
上OPP護膜裝置(有底紙和無底紙均可)
CORONA表面處理設備(金屬)
靜電消除器
冷卻系統
冷燙+UV

Suitable Materials

1. Adhesive paper, Laminate materials, BOPP film
2. Shrinkable film, Styrofoam and other special materials

適用材料

1. 貼紙、積層材、BOPP膜
2. 收縮膜、石化附屬環保材料和特殊材料等

Suitable Die-cutter

1. Magnetic cylinder flexible plate, rotary die
2. Rotary hard dies

適用刀模

1. 磁性圓刀模
2. 雕刻圓洞刀模

Standard Plate Making Reference

1. Photopolymer
2. Hardness 45°~55°
3. Thickness 0.95mm
4. Depth 0.69mm (Reference)

印版凸版

1. 樹脂版
2. 版材硬度45°~55°
3. 版材厚度0.95mm(全厚)
4. 洗刷深度0.69mm(參考)

Features

Server Ink Control System

According to the speed of machine to adjust the amount of ink supply to provide the best printing performance.

Rotary Die-Cutting

Control with linear direction and pressure adjustments. This unit can be accompanied with the die-cutting, computer sprocket hole punching, perforation lines and in-mold-label die cutting.

PLC UV-Control

With PLC UV-Control, the breakdown of control housing, including the strength and usage hours of the UV lights can be detected.

Central Wheel Rotational Alignment System

Precise alignment with the red mark on the printing cylinder can reduce the adjusting time. This system is controlled by servo motor.

特色

※伺服控墨系統

根據機器運轉的速度，調整油墨供給的量，以達到最好的印刷效果。

※圓塹座

高速印行中設有直線和壓力調整控制，此裝備可用於磁性刀和圓筒雕刻刀，虛線刀和膜內貼圓塹。

※PLC紫外線控制

UV紫外線採PLC控制，可檢測控制箱內之故障排除-顯示點燈強度和燈管使用時數。

※大輪定轉對位系統

精準定位，與版胴上之紅點記號配合，節省校車操作時間。此系統之主機馬達為伺服馬達。

Specification

- Gearing 1/8"cp
- Max. Paper Width 260mm
- Max. Printing Width 250mm
- Unwind Roll Dia. Max 800mm
- Rewind Roll Dia. Max 800mm
- Printing Speed Max. 100m/min
- Printing Length (Max) 460.375mm
- Printing Length (Min) 190.5mm
- Server Motor 11kW
- Ink Kneading Motor (6pcs) 1200kW
- Unwind Motor 3.75kW
- UV Dryer (6pcs) 36kW
- UV Dryer for Flexo Varnish Unit (1pc) 6kW
- Machine Size W/183cm L/550cm H/262cm

規格

- 傳動齒輪 1/8"cp
- 最大紙寬 260mm
- 最大印刷寬度 250mm
- 送紙徑(最大) 800mm
- 複捲徑(最大) 800mm
- 印刷速度(最高) 100m/min
- 印刷長度(最長) 460.375mm
- 印刷長度(最短) 190.5mm
- 主機馬達 11kW
- 勻墨馬達(6個) 1200kW
- 收料馬達 3.75kW
- UV乾燥機(6座) 36kW
- 上金油座UV乾燥機(1座) 6kW
- 機械尺寸 寬/183cm 長/550cm 高/262cm

大陸印刷機械有限公司

Da Shen Printing Machine CO., LTD



工廠：嘉義市磚磘里2鄰磚磘92號

電話：886-5-2867019

傳真：886-5-2861427

<http://www.label-printing-machines.com/>

E-mail: ds5888.ms35@msa.hinet.net

E-mail: da.shen_printing@yahoo.com.tw

